

Φ3.6x10mm, RoHS Compliant SLOW-BLOW MICROFUSE 慢断型保险丝管

PATENT NO. 专利号: ZL 02220684.1

INTERRUPTING CAPACITY / 分断能力:

- 50 amperes at 125V/250V/ AC (100mA-10A)
- 30 amperes at 350V AC (200mA-1.6A)
- 50 amperes at 350V AC (2A-10A)
- 100 amperes at 125V/250V AC (1A-5A) PSE

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证										REFERENCE (A ² .Sec.) (RoHS) iT 参考值	
		CCC		VDE	UL(cUL)			UR(cUR)			CSA		PSE
		H ₂	H ₂ /L	H ₁	H ₂	L	H ₁	H ₁	H ₂	L	H ₂		L
30TS-0200H ₂ /H ₂ /L	200mA	●											0.02501
30TS-0250H ₂ /H ₂ /L	250mA	●	●										0.03851
30TS-0300H ₂ /H ₂ /L	300mA												0.06389
30TS-0315H ₂ /H ₂ /L	315mA	●	●										0.08730
30TS-0350H ₂ /H ₂ /L	350mA												0.1118
30TS-0375H ₂ /H ₂ /L	375mA												0.1426
30TS-0400H ₂ /H ₂ /L	400mA		●										0.1488
30TS-0500H ₂ /H ₂ /L	500mA	●	●										0.2581
30TS-0600H ₂ /H ₂ /L	600mA												0.4782
30TS-0630H ₂ /H ₂ /L	630mA	●	●										0.6634
30TS-0700H ₂ /H ₂ /L	700mA												0.8058
30TS-0750H ₂ /H ₂ /L	750mA												0.9581
30TS-0800H ₂ /H ₂ /L	800mA	●	●										1.227
30TS-010H ₂ /H ₂ /L	1A	●	●										2.063
30TS-012H ₂ /H ₂ /L	1.2A												4.005
30TS-013H ₂ /H ₂ /L	1.25A	●	●										4.101
30TS-015H ₂ /H ₂ /L	1.5A												5.725
30TS-016H ₂ /H ₂ /L	1.6A	●	●										6.024
30TS-020H ₂ /H ₂ /L	2A	●	●										12.05
30TS-023H ₂ /H ₂ /L	2.25A												15.36
30TS-025H ₂ /H ₂ /L	2.5A	●	●										20.53
30TS-030H ₂ /H ₂ /L	3A												27.28
30TS-032H ₂ /H ₂ /L	3.15A	●	●										30.07
30TS-035H ₂ /H ₂ /L	3.5A												34.43
30TS-040H ₂ /H ₂ /L	4A	●	●										57.55
30TS-050H ₂ /H ₂ /L	5A												98.26
30TS-060H ₂ /H ₂ /L	6A												29.38
30TS-063H ₂ /H ₂ /L	6.3A	●	●										33.44
30TS-070H ₂ /H ₂ /L	7A												44.28
30TS-080H ₂ /H ₂ /L	8A												62.39
30TS-090H ₂ /H ₂ /L	9A												78.70
30TS-100H ₂ /H ₂ /L	10A												109.5
30TS-120H ₂ /H ₂ /L	12A												187.1
30TS-150H ₂ /H ₂ /L	15A												345.2


● DENOTES FOR APPROVED ● 表示已取得安全认证
 H₁ DENOTES FOR 350V H₁ 代表 350V
 H₂ DENOTES FOR 250V H₂ 代表 250V
 L DENOTES FOR 125V L 代表 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hours Min. 最快 4 小时
200%	60 seconds Max. 最慢 60 秒 (200mA-800mA) 1-60 seconds Max. 1-60 秒 (1A-10A)

Dimensions/ 尺寸:


Unit 单位: mm

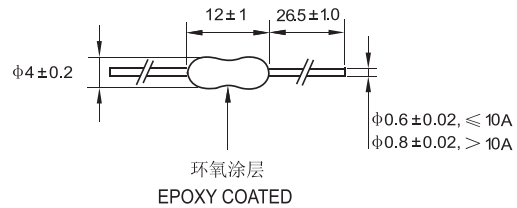

PACKING/ 包装:

1. INNER BOX/ 内盒: AMMO PACK

Unit 单位: mm

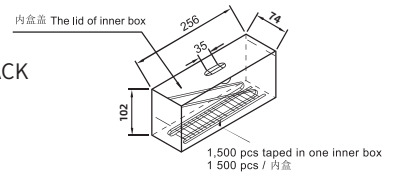


2. OUTER CARTON/ 外箱: 10 INNER BOXES / CARTON
 CARTON SIZE / 尺寸: L400x W220 x H230(mm)

30TS AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

30TS 平均 I-T 曲线图 (仅供参考)

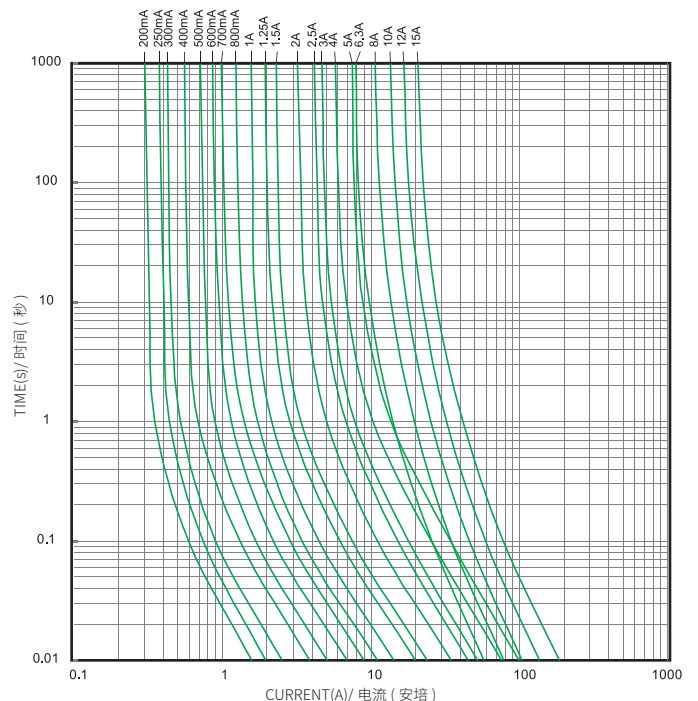

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s