

Φ6.35x32mm, RoHS Compliant & Pb-Free CERAMIC TUBE FUSE (SLOW-BLOW) 瓷保险丝管 (慢断型)

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证												REFERENCE (A ² .Sec) (RoHS) I ² T 参考值	
		UL(cUL)		UR(cUR)		PSE		KC		TÜV		CQC			
		H	L	H	L	H	L	H	H	L	H	L			
65TS-0500H/L	500mA	●	●				●								
65TS-0600H/L	600mA	●	●				●								
65TS-0630H/L	630mA	●	●				●								
65TS-0750H/L	750mA	●	●				●								
65TS-0800H/L	800mA	●	●				●								
65TS-010H/L	1A	●	●			●	●	●							0.5117
65TS-012H/L	1.2A	●	●			●	●	●							0.4802
65TS-013H/L	1.25A	●	●			●	●	●							0.5002
65TS-015H/L	1.5A	●	●			●	●	●							0.7983
65TS-016H/L	1.6A	●	●			●	●	●							1.521
65TS-020H/L	2A	●	●			●	●	●							2.342
65TS-025H/L	2.5A	●	●			●	●	●							4.545
65TS-030H/L	3A	●	●			●	●	●	●	●					4.987
65TS-032H/L	3.15A	●	●			●	●	●	●	●					5.246
65TS-035H/L	3.5A	●	●			●	●	●	●	●					8.456
65TS-040H/L	4A	●	●			●	●	●	●	●					12.47
65TS-050H/L	5A	●	●			●	●	●	●	●					26.52
65TS-060H/L	6A	●	●			●	●	●	●	●					49.68
65TS-070H/L	7A	●	●			●	●	●	●	●					70.47
65TS-080H/L	8A	●	●			●	●	●	●	●					108.5
65TS-100H/L	10A	●	●			●	●	●	●	●	●				238.8
65TS-120H/L	12A	●	●			●	●	●	●	●	●				434.6
65TS-130H/L	12.5A	●	●			●	●	●	●	●	●				531.2
65TS-150H/L	15A	●	●			●	●	●	●	●	●				720.1
65TS-160H/L	16A					●						●			950
65TS-200H/L	20A			●	●	●		●	●	●	●	●			2008
65TS-250H/L	25A			●	●	●		●	●	●	●	●			3511
65TS-300H/L	30A			●	●	●		●	●	●	●	●			6658

● DENOTES FOR APPROVED

H DENOTES FOR 250V

L DENOTES FOR 125V

● 表示已取得安全认证

H 代表 250V

L 代表 125V

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
135%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒
1000%	300 ms Max.	最慢 300 ms(10A, 12.5A, 16A, 20A)

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

BREAKING CAPACITY / 分断能力:

10,000 amperes at 125V AC (500mA-15A)

35 amperes at 250V AC (500mA-1A)

100 amperes at 250V AC (1.2A-3.5A)

200 amperes at 250V AC (4A-10A)

750 amperes at 250V AC (12A-15A)

400 amperes at 125V AC (20A-30A)

100 amperes at 250V AC (20A-30A)

500 amperes at 125V AC (1A-15A) PSE

100 amperes at 250V AC (1A-30A) PSE


100 amperes at 250V AC (500mA-10A) KC

1500 amperes at 250V AC (10A, 12.5A, 16A, 20A) CQC


Dimensions/ 尺寸:

Unit 单位: mm

65TS



65TS(P)

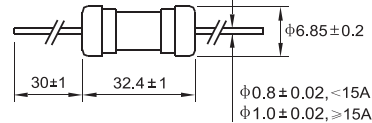

65TS AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

65TS 平均 I-T 曲线图 (仅供参考)

